



# DIMMABLE LED CAPSULE

 Product&Family Code: **001 007 0003**
**PIKO-3**



## Technical Drawing

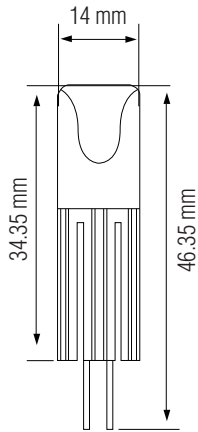

## Photometric Diagram

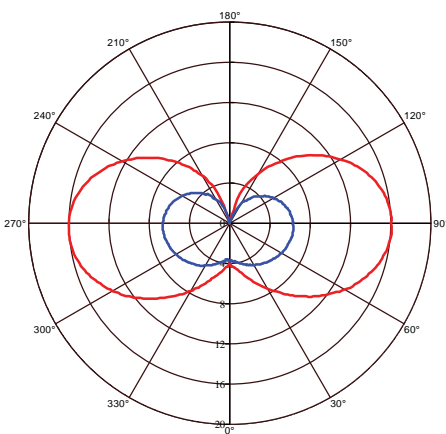

C0 Plane beam angle(50%) C90 Plane beam angle(50%)  
 C0 Plane beam angle(50%):278.2(DEG) C90 Plane beam angle(50%):283.5(DEG)

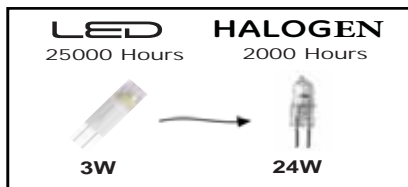

## Technical Data

Voltage (V)	220-240V AC
Product Wattage (W)	3
Equivalence with Halogen lamp	24
Colour Render Index (Ra)	>Ra70
Colour Temperature (K)	2700K-6400K
Materials	Plastic
Protection Class	-
Dimmable	Yes
EEI	<b>A+</b>
Warm-up time up to 60 %of the full light output	Instant Full Light
Luminous Flux (lm)	210
Luminous Efficacy (lm/W)	70
Rated Life (hrs) ⌚	25,000
IP Rating	-
Power Factor	>0.8
Beam Angle ☆	280°±r
Starting Time	<0.5s
Number of ON-OFF cycling	x10,000

## Applications

- Chandelier, Halogen Downlight etc.



## Features

- Very low energy consumption.
- High Lumen and CRI, good quality
- High heat dissipation, low carbon and environmental protection

