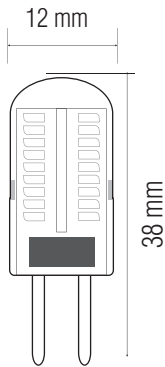
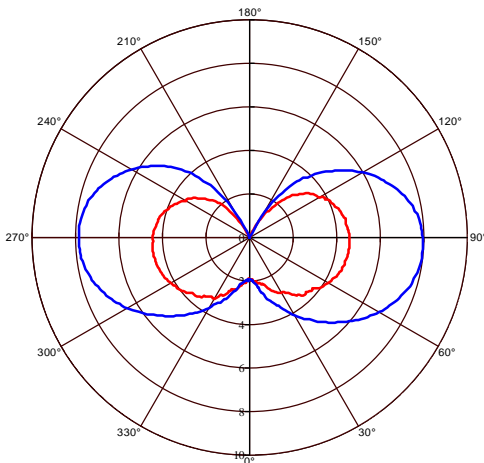
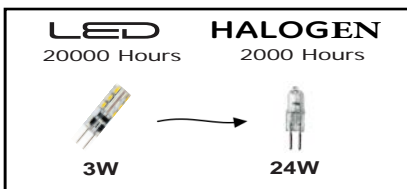


# LED CAPSULE

 Product&Family Code: **001 010 0003**
**MICRO-3**

**Technical Drawing**

**Photometric Diagram**


b C0 Plane beam angle(50%)    b C90 Plane beam angle(50%)


**Technical Data**

Voltage (V)	220-240V AC
Product Wattage (W)	3
Equivalence with Halogen lamp	24
Colour Render Index (Ra)	>Ra70
Colour Temperature (K)	2700K - 6400K
Materials	Silicone
Protection Class	-
Dimmable	No
EEL	<b>A<sup>+</sup></b>
Warm-up time up to 60 %of the full light output	Instant Full Light
Luminous Flux (lm)	150
Luminous Efficacy (lm/W)	50
Rated Life (hrs) ⌚	20,000
IP Rating	-
Power Factor	>0.5
Beam Angle ☆	360 °
Starting Time	<0.5s
Number of ON-OFF cycling	x10,000

**Applications**

- Chandelier, Halogen Downlight etc.


**Features**

- Very low energy consumption.
- High Lumen and CRI, good quality
- High heat dissipation, low carbon and environmental protection

