

LED PROJECTOR


Product Code: **068 005 0400**

PANTER-400




 Black

Technical Drawing

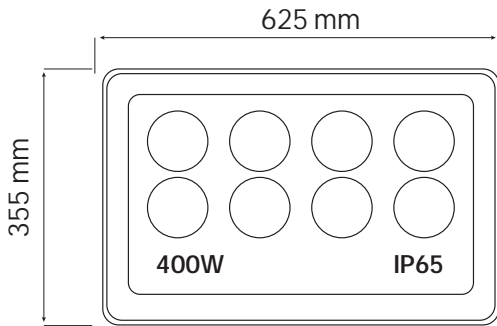


Technical Data	
Voltage (V)	85-265V
Product Wattage (W)	400
Equivalence with incandescent lamp(W)	3200
Colour Render Index (Ra)	>Ra80
Colour Temperature (K)	2700K - 4200K - 6400K
Materials	Aluminium Die Casting Body
Protection Class	I
Dimmable	No
EEI	A to A++
Warm-up time up to 60 %of the full light output	Instant Full Light
Luminous Flux (lm)	30000
Luminous Efficacy (lm/W)	75
Rated Life (hrs) ⌚	50.000
IP Rating	65
Power Factor	>0.9
Beam Angle	40°
Starting Time	<0.2s
Number of ON-OFF cycling	x25.000

Photometric Diagram

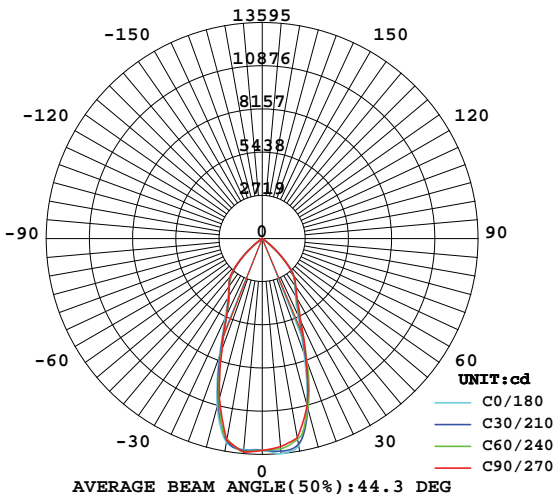

Applications

- Stadiums, Outdoor



Features

- High Lumen and CRI, Good quality & Constant Current driver.
- High heat dissipation, low carbon and environmental protection.
- COB LED Lamp Base.
- Very low energy consumption.

