


LED WALL LIGHT




WHITE
BLACK

Technical Drawing



Photometric Diagram

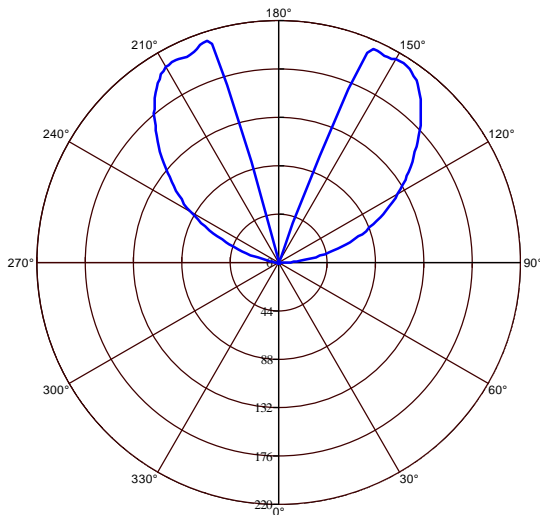

↳ C0 Plane beam angle(50%) ↳ C90 Plane beam angle(50%)

C0 Plane beam angle(50%):57.5(DEG) C90 Plane beam angle(50%):322.9(DEG)

Product&Family Code:

029 006 0008

SISAM

Technical Data

Voltage (V)	100-240V
Product Wattage (W)	8
Equivalence with incandescent lamp(W)	64
Colour Render Index (Ra)	>Ra 70
Colour Temperature (K)	4200
Materials	Iron
Protection Class	II
Dimmable	No
EEI	A to A++
Warm-up time up to 60 %of the full light output	Instant Full Light
Luminous Flux (lm)	320
Luminous Efficacy (lm/W)	40
Rated Life (hrs) ⌚	30.000
IP Rating	20
Power Factor	>0.5
Beam Angle	180°
Starting Time	<0.2s
Number of ON-OFF cycling	x15.000

Applications

- Styled bedroom, hallway, living room or dining area.



Features

- High Lumen and CRI, Good quality & Constant Current driver.
- High heat dissipation, low carbon and environmental protection.
- SMD LED Lamp Base.
- Very low energy consumption.

